

RHTemp101A

Humidity and Temperature Data Logger



For many applications that require the monitoring of both ambient temperature and humidity, the RHTemp101A is the ideal solution. Used for warehouse and museum monitoring as well as HVAC studies, the RHTemp101A can measure ambient temperature from -40 °C to +80 °C and humidity from 0 %RH to 95 %RH.

This compact device can be placed virtually anywhere to provide an accurate temperature and humidity record of the environment. Use several RHTemp101A's to capture a thorough mapping of large rooms or facilities.

Using the MadgeTech Software, the device can be configured to record at user selected intervals as frequent as one reading every second to as seldom as one reading every 24 hours. With a 10 year battery life and the ability to store over 1,000,000 readings per channel, the RHTemp101A is perfect for long term data logging studies.

This affordable, low maintenance device is popular for many applications in the medical & pharmaceutical industry, storage monitoring and general purpose humidity recording.

FEATURES

- 10 Year Battery Life
- 1 Second Reading Rate
- Multiple Start/Stop Function
- Ultra High Speed Download
- 1,047,552 Readings Per Channel, Storage Capacity
- Memory Wrap
- Precision RTD Sensing Element
- Battery Life Indicator
- Optional Password Protection
- Programmable High and Low Alarms
- NIST Traceable
- Field Upgradeable


BENEFITS

- Simple Setup and Installation
- Minimal Long-Term Maintenance
- Long-Term Field Deployment
- Compact and Portable

APPLICATIONS


- Implement HACCP Programs
- HVAC
- Warehouse Monitoring
- Museum Monitoring
- Medical/Pharmaceutical
- General Purpose Humidity Recording

MadgeTech 4 Software Features

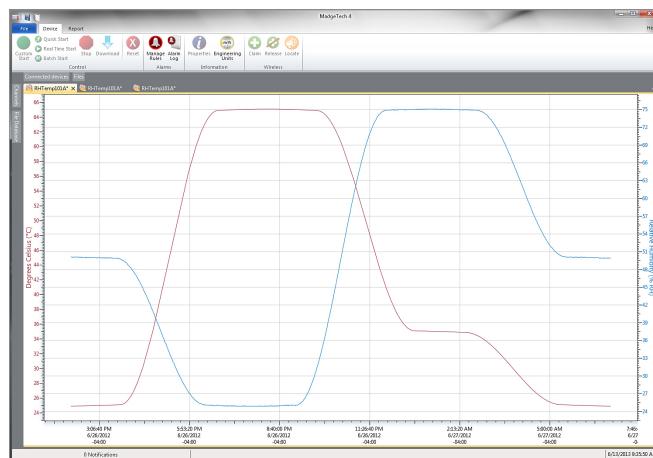


Graph View


- Multiple graph overlay
- Statistics
- Digital calibration
- Zoom in/ zoom out
- Lethality equations (F0, PU)
- Mean Kinetic Temperature
- Full time zone support
- Data annotation
- Min./Max./Average lines
- Summary view




Export to Excel



Automation



Tabular Data View



Statistics

Specifications

Specifications are subject to change without notice. Specific warranty remedy limitations apply.
Call **(603) 456-2011** or go to **madgetech.com** for details.

GENERAL		TEMPERATURE
Start Modes	Immediate start Delay start up to 18 months Multiple pushbutton start/stop	Temperature Sensor Precision RTD Element
Stop Modes	Manual through software Timed (specific date and time)	Temperature Range -40 °C to +80 °C (-40 °F to +176 °F)
Multiple Start/Stop Mode	Start and stop the device multiple times without having to download data or communicate with a PC	Temperature Resolution 0.01 °C (0.02 °F)
Real Time Recording	May be used with PC to monitor and record data in real time	Calibrated Accuracy ±0.5 °C (±0.9 °F) from 0 °C to 55 °C (+32 °F to +131 °F) ±1.0 °C (±1.8 °F) from -40 °C to 0 °C (-40 °F to +32 °F) and +55.01 °C to +80 °C (+131.01 °F to +176 °F)
Password Protection	An optional password may be programmed into the device to restrict access to configuration options. Data may be read out without the password	Humidity
Memory	1,047,552 readings per channel; software configurable memory wrap 349,184 readings in multiple start/stop mode	Humidity Sensor Internal Semiconductor
Wrap Around	Yes	Humidity Range 0 %RH to 95 %RH
Reading Rate	1 reading every second up to 1 reading every 24 hours	Humidity Resolution 0.1 %RH
Alarm	Programmable high and low limits; alarm is activated when humidity reaches or exceeds set limits	Calibrated Accuracy ±3.0 %RH
LEDs	2 status LEDs	Specified Accuracy Range 25 %RH to 75 %RH +20 °C to +40 °C Hysteresis Error 1 % typical, 3 % Maximum
Calibration	Digital calibration through software	
Calibration Date	Automatically recorded within device	
Battery Type	3.6 V lithium battery included; user replaceable	
Battery Life	10 years typical at a 15 minute reading rate	
Data Format	Date and time stamped °C, °F, K, °R ; %RH, mg/ml water vapor concentration, dew point	
Time Accuracy	±1 minute/month at 25 °C (77 °F)	
Computer Interface	USB (interface cable required); 115,200 baud	
Operating System Compatibility	Windows XP SP3 or later	
Software Compatibility	Standard Software version 2.03.06 or later Secure Software version 4.1.3.0 or later	
Operating Environment	-40 °C to +80 °C (-40 °F to +176 °F) 0 %RH to 95 %RH non-condensing	
Dimensions	1.4 in x 2.1 in x 0.6 in (35 mm x 54 mm x 15 mm)	
Weight	0.8 oz (24 g)	
Material	Polycarbonate	
Approvals	CE	

Ordering Information

RHTemp101A	PN 901499-00	Humidity and Temperature Data Logger
IFC200	PN 900298-00	USB interface cable
LTC-7PN	PN 900352-00	Replacement battery for the RHTemp101A

For Quantity Discounts call **(603) 456-2011** or email **sales@madgetech.com**.